

DATE	ISSUED TO	PR	TR
10/8/92	POST AUTHORITY FOR APPROVAL	12	-
10/8/92	CFSC	2	-
11/1/92	CFSC, FOR BIDDING	GO	-
5/9/92	CFSC	-	5
10-92	POST AUTHORITY FOR APPROVAL	12	-
10-92	BAUER/CAMMAY & SONS	1	-
21-92	CDP/MESTEL	-	1
26-92	POST AUTHORITY FOR APPROVAL	12	-


DATE	ISSUED TO	PR	TR
10/8/92	POST AUTHORITY FOR APPROVAL	12	-
10/8/92	CFSC	2	-
11/1/92	CFSC, FOR BIDDING	GO	-
5/9/92	CFSC	-	5
10-92	POST AUTHORITY FOR APPROVAL	12	-
10-92	BAUER/CAMMAY & SONS	1	-
21-92	CDP/MESTEL	-	1
26-92	POST AUTHORITY FOR APPROVAL	12	-


NOTE:
THIS DRAWING SHALL BE USED FOR LOCATION OF H.V.A.C. DIFFUSERS & GRILLES ONLY. SEE MECHANICAL ENGINEERING DRAWING M-1 THRU M-3 FOR ALL DUCTWORK, DISBURSERS & H.V.A.C. SPECIFICATIONS.

NOTE:
THIS DRAWING SHALL BE USED FOR CEILING LAYOUT, SWITCHING ARRANGEMENT & EQUIPMENT LOCATION ONLY. SEE ELECTRICAL ENGINEERING DRAWINGS E-1 THRU E-7 FOR ALL CIRCUITING, PANEL BOARD LOCATIONS & ELECTRICAL SPECIFICATIONS.

LIGHTING NOTES


1. THE CONTRACTOR SHALL VERIFY WITH THE ARCHITECT AND/OR ENGINEER, THAT ALL LIGHTING EQUIPMENT MEETS ALL NATIONAL & LOCAL CODES AS APPLICABLE. E.G. THERMAL PROTECTION @ U.L. LABEL
2. THE CONTRACTOR & MANUFACTURERS SHALL BE RESPONSIBLE FOR THE PROPER VENTILATION @ TEMPERATURE CONDITIONS OF THE LIGHTING FIXTURES
3. THE CONTRACTOR SHALL SUBMIT FOR WRITTEN APPROVAL OF THE ARCHITECT, MANUFACTURERS CATALOG SPECIFICATION SHEETS FOR ALL STANDARD LIGHT FIXTURES PRIOR TO PURCHASE OF SAME
4. ALL COMPONENT PARTS OF THE ARCHITECTURAL LIGHTING INSTALLATION SHALL BE PROVIDED BY THE GENERAL CONTRACTOR. COLOR @ FINISH SPECIFICATIONS SHALL BE BY THE ARCHITECT UNLESS OTHERWISE DESIGNATED IN THE SPECIFICATIONS
5. THE CONTRACTOR SHALL VERIFY THE CEILING CONSTRUCTION FOR EACH FIXTURE TYPE & LOCATION AND SHALL COORDINATE WITH THE TOWN OFFICE
6. SPECIFIC OTHERWISE SPECIFIED VOLTAGES OF ALL LAMPS SHALL BE DETERMINED BY THE ELECTRICAL ENGINEER. THE ELECTRICAL CONTRACTOR SHALL COORDINATE PROPER LAMP BASE TYPES WITH SOCKETS PROVIDED IN SPECIFIED FIXTURES
7. ALL FLUORESCENT LAMPS UNLESS NOTED OTHERWISE SHALL BE WARM WHITE IN COLOR RENDITION
8. ALL FLUORESCENT FIXTURES REQUIRING DIMMING BALLASTS SHALL HAVE UNIVERSAL STEEL BALLASTS AS DOWNLOADED BY THE DIMMER MANUFACTURER LUTSON ELECTRONIC CO.
9. ALL FLUORESCENT LIGHTING BALLASTS SHALL BE U.L. CLASS 'P' PER A.L. REQUIREMENTS

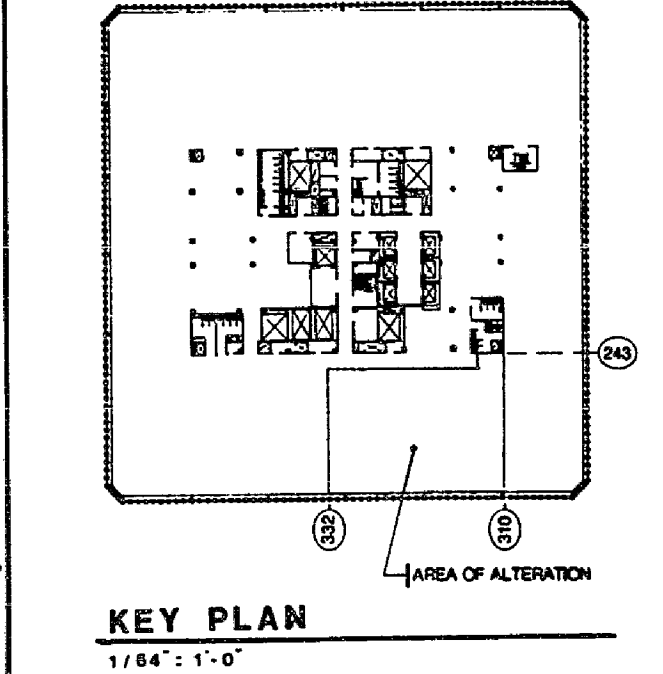

	G-8-92	REVISED CEILING AREAS IN SPACE NO. 1, 3, & 412 PER PORT AUTHORITY COMMENTS, DATED 5-18-92, REVISED QUANTITY OF TYPE L-B FIXTURES	JEP
NO	DATE	REVISION	BY

**CANTOR, FITZGERALD
SECURITIES CORP.**
105th FLOOR
ONE WORLD TRADECENTER, NEW YORK, N.Y.

**PROPOSED ALTERATION TO
G.S.B. TRADING ROOM
REFLECTED CEILING PLAN**

 NORTH	PROJECT NO. 712
	SCALE 1/4" = 1'-0"
	DRAWN BY J.F.P.
	CHECKED BY <i>[Signature]</i>
	DATE 4-27-92

DRAWING NO. 105 R = 7